
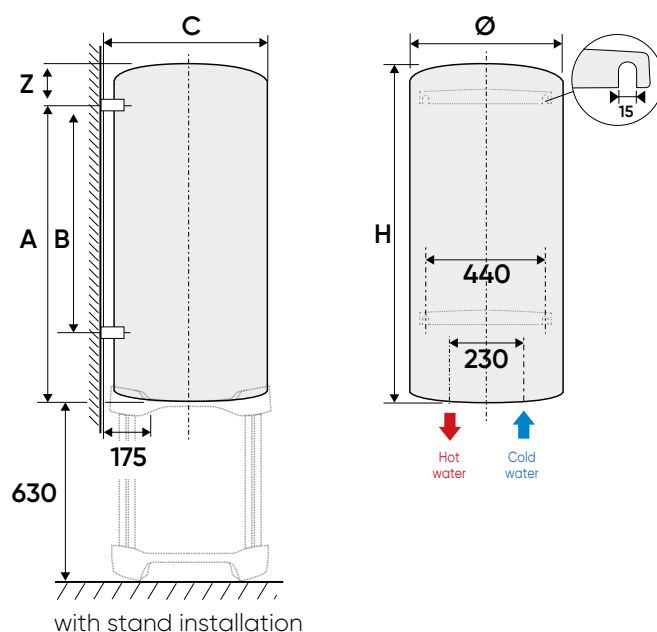


Zeneo

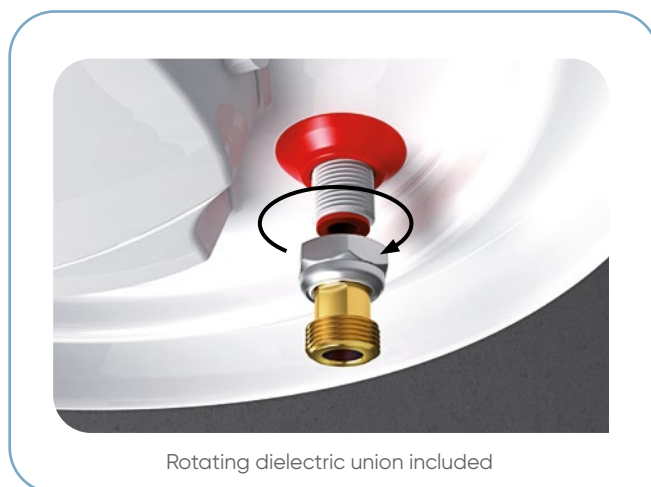

Technical specifications and installation dimensions

Model	Output (W)	Voltage (V)	Heating time	Hot water capacity at 40°C	Cooling constant	Energy consumption kWh/24 h	Dimensions (mm)						Net weight (kg)	ErP energy class	Profile
							Ø	H	A	B	Z	C			
Zeneo Standard Vertical wall-mounted															
50	1200	230 V single phase	2h23	-	0.35	0.82	505	575	370	-	172	530	23		M
75	1200	230 V single phase	4h08	142 L	0.28	1.08	513	705	570	-	135	530	23		M
100	1200	230 V single phase	5h27	177 L	0.27	1.28	513	835	750	-	85	530	27		L
150	1800	230 V single phase kit for 400 V 3-phase	5h14	277 L	0.23	1.65	513	1155	1050	800	105	530	35		M
200	2200		5h44	374 L	0.20	1.94	513	1475	1050	800	425	530	45		L
Zeneo Vertical wall-mounted turbo range															
50	1800	230 V single phase kit for 400 V 3-phase	1h27	-	0.35	0.82	505	575	370	-	172	530	23		M
75	3000		1h37	132 l	0.31	1.11	510	735	575	-	135	530	27		M
100	3000		2h20	184 L	0.28	1.34	510	900	750	-	85	530	30		L
150	3000		3h20	269 L	0.22	1.56	530	1200	1050	800	105	550	39		M
200	3000		4h46	363 L	0.20	1.87	530	1515	1050	800	425	550	49		L